

1°外部特征:(见图纸)

SCO.01.0002

Geometry:See drawing

2°初始技术特性:(试验前)

Primary Technical Properties:(before test)

电压等级: Tension and limits:		65V-95V	90V/15	90V/20	145V/15	150V/20
直流导通电压: DC Spark-over Voltage:	100V/s	65V-95V	77V-103V	72V-108V	124V-166V	120V-180V
冲击导通电压: Impulse Spark-over Voltage:	1kV/μs	≤640V	≤640V	≤640V	≤640V	≤640V
绝缘电阻: Insulation Resistance:	≤90V ≥90V 50V DC 100V DC	≥10GΩ	≥10GΩ	≥10GΩ	≥10GΩ	≥10GΩ
极间电容: Capacitance:	1MHz	≤0.8pF	≤0.8pF	≤0.8pF	≤0.8pF	≤0.8pF
过保护电压: Holdover Voltage:	RC//:150Ω- 100nF;RS=330Ω	≥60V	≥60V	≥60V	≥75V	≥75V
辉光降压: Glow Voltage:		≤80V	≤80V	≤80V	≤80V	≤80V
弧光降压: Arc Voltage:		≤25V	≤25V	≤25V	≤25V	≤25V

3°耐流特性:(试验后满足)

Power-flow Properties:(after life test)

直流导通电压: DC Spark-over Voltage:		65V-95V	77V-103V	72V-108V	124V-166V	120V-180V
冲击导通电压: Impulse Spark-over Voltage:		≤640V	≤640V	≤640V	≤640V	≤640V
绝缘电阻: Insulation Resistance:		≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ
交流耐流: AC discharge current:	50/60Hz,600V 5times,1s interval 3min	10A	10A	10A	10A	10A
冲击耐流波形: Impulse discharge current:	8/20μs +5/-5,interval 3min	10kA	10kA	10kA	10kA	10kA
冲击耐流波形: Impulse discharge current:	8/20μs 1time	25kA	25kA	25kA	25kA	25kA
冲击耐流波形: Impulse discharge current:	10/350μs 1time	2KA	2KA	2KA	2KA	2KA
冲击耐流寿命: Impulse life:	10/1000μs 300times,interval 2min	100A	100A	100A	100A	100A

4°产品编码:

Code:


	9284049	9284051	9284001	9284053	9284002
QVGQ2.E184939	YES	YES	YES	YES	YES
REG.-Nr.40008209					

注:1. 可焊接性根据CEI 68-2-20 ; Solderability see CEI 68-2-20

2. 本产品符合2002/95/EC directive(ROHS);所有试验条件均满足ITU-T K.12要求。

This product is 2002/95/EC directive(ROHS);all test are ITU-T K.12 compliant.

总经理	总经理助理	销售部	质量部	技术工程部	生产部	日期	编码 N°
GM	GDTM	SD	QD	TD	PD	Date	Code N°
						2009-5-7	92 840 XX XX

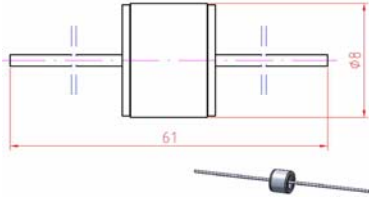

1°外部特征:(见图纸)

SCO.01.0002

Geometry:See drawing

2°初始技术特性:(试验前)

Primary Technical Properties:(before test)

电压等级: Tension and limits:		180V/20	230V/10	230V/15	230V/20	240V/15
直流导通电压: DC Spark-over Voltage:	100V/s	144V-216V	207V-253V	195V-265V	184V-276V	204V-276V
冲击导通电压: Impulse Spark-over Voltage:	1kV/μs	≤700V	≤700V	≤700V	≤700V	≤700V
绝缘电阻: Insulation Resistance:	≤90V ≥90V 50V DC 100V DC	≥10GΩ	≥10GΩ	≥10GΩ	≥10GΩ	≥10GΩ
极间电容: Capacitance:	1MHz	≤0.8pF	≤0.8pF	≤0.8pF	≤0.8pF	≤0.8pF
过保护电压: Holdover Voltage:	RC//:150Ω- 100nF;RS=330Ω	≥75V	≥80V	≥80V	≥80V	≥80V
辉光降压: Glow Voltage:		≤80V	≤100V	≤100V	≤100V	≤100V
弧光降压: Arc Voltage:		≤25V	≤25V	≤25V	≤25V	≤25V

3°耐流特性:(试验后满足)

Power-flow Properties:(after life test)

直流导通电压: DC Spark-over Voltage:		144V-216V	207V-253V	195V-265V	184V-276V	204V-276V
冲击导通电压: Impulse Spark-over Voltage:		≤700V	≤700V	≤700V	≤700V	≤700V
绝缘电阻: Insulation Resistance:		≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ
交流耐流: AC discharge current:	50/60Hz,600V 5times,1s interval 3min	10A	10A	10A	10A	10A
冲击耐流波形: Impulse discharge current:	8/20μs +5/-5,interval 3min	10kA	10kA	10kA	10kA	10kA
冲击耐流波形: Impulse discharge current:	8/20μs 1time	25kA	25kA	25kA	25kA	25kA
冲击耐流波形: Impulse discharge current:	10/350μs 1time	2KA	2KA	2KA	2KA	2KA
冲击耐流寿命: Impulse life:	10/1000μs 300times,interval 2min	100A	100A	100A	100A	100A

4°产品编码:

Code:


	9284004	9284062	9284007	9284057	9284008
QVGQ2.E184939	YES	YES	YES	YES	YES
REG.-Nr.40008209					

注:1. 可焊接性根据CEI 68-2-20 ; Solderability see CEI 68-2-20

2. 本产品符合2002/95/EC directive(ROHS);所有试验条件均满足ITU-T K.12要求。

This product is 2002/95/EC directive(ROHS);all test are ITU-T K.12 compliant.

总经理 GM	总经理助理 GDTM	销售部 SD	质量部 QD	技术工程部 TD	生产部 PD	日期 Date	编码 N° Code N°
						2009-5-7	92 840 XX XX

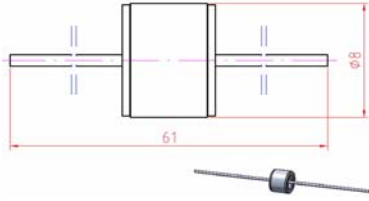

1°外部特征:(见图纸)

SCO.01.0002

Geometry:See drawing

2°初始技术特性:(试验前)

Primary Technical Properties:(before test)

电压等级: Tension and limits:		250V/12	250V/20	350V/15	350V/20	470V/15
直流导通电压: DC Spark-over Voltage:	100V/s	220V-280V	200V-300V	298V-402V	280V-420V	400V-540V
冲击导通电压: Impulse Spark-over Voltage:	1kV/μs	≤750V	≤750V	≤850V	≤850V	≤1100V
绝缘电阻: Insulation Resistance:	≤90V ≥90V 50V DC 100V DC	≥10GΩ	≥10GΩ	≥10GΩ	≥10GΩ	≥10GΩ
极间电容: Capacitance:	1MHz	≤0.8pF	≤0.8pF	≤0.8pF	≤0.8pF	≤0.8pF
过保护电压: Holdover Voltage:	RC//:150Ω- 100nF;RS=330Ω	≥80V	≥80V	≥80V	≥80V	≥80V
辉光降压: Glow Voltage:		≤100V	≤100V	≤100V	≤100V	≤120V
弧光降压: Arc Voltage:		≤25V	≤25V	≤25V	≤25V	≤25V

3°耐流特性:(试验后满足)

Power-flow Properties:(after life test)

直流导通电压: DC Spark-over Voltage:		220V-280V	200V-300V	298V-402V	280V-420V	400V-540V
冲击导通电压: Impulse Spark-over Voltage:		≤750V	≤750V	≤850V	≤850V	≤1100V
绝缘电阻: Insulation Resistance:		≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ
交流耐流: AC discharge current:	50/60Hz,600V 5times,1s interval 3min	10A	10A	10A	10A	10A
冲击耐流波形: Impulse discharge current:	8/20μs +5/-5,interval 3min	10kA	10kA	10kA	10kA	10kA
冲击耐流波形: Impulse discharge current:	8/20μs 1time	25kA	25kA	25kA	25kA	25kA
冲击耐流波形: Impulse discharge current:	10/350μs 1time	2KA	2KA	2KA	2KA	2KA
冲击耐流寿命: Impulse life:	10/1000μs 300times,interval 2min	100A	100A	100A	100A	100A

4°产品编码:

Code:


	9284009	9284059	9284065	9284015	9284071
QVGQ2.E184939	YES	YES	YES	YES	YES
REG.-Nr.40008209					

注:1. 可焊接性根据CEI 68-2-20 ; Solderability see CEI 68-2-20

2. 本产品符合2002/95/EC directive(ROHS);所有试验条件均满足ITU-T K.12要求。

This product is 2002/95/EC directive(ROHS);all test are ITU-T K.12 compliant.

总经理 GM	总经理助理 GDTM	销售部 SD	质量部 QD	技术工程部 TD	生产部 PD	日期 Date	编码 N° Code N°
						2009-5-7	92 840 XX XX

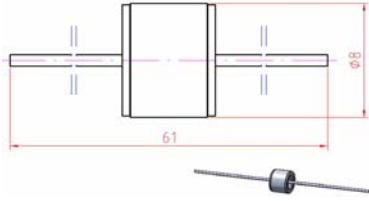

1°外部特征:(见图纸)

SCO.01.0002

Geometry:See drawing

2°初始技术特性:(试验前)

Primary Technical Properties:(before test)

电压等级: Tension and limits:		470V/20	500V/15	500V/20	700/15
直流导通电压: DC Spark-over Voltage:	100V/s	376V-564V	425V-575V	400V-600V	595V-805V
冲击导通电压: Impulse Spark-over Voltage:	1kV/μs	≤1100V	≤1200V	≤1200V	≤1300V
绝缘电阻: Insulation Resistance:	≤90V ≥90V 50V DC 100V DC	≥10GΩ	≥10GΩ	≥10GΩ	≥10GΩ
极间电容: Capacitance:	1MHz	≤0.8pF	≤0.8pF	≤0.8pF	≤0.8pF
过保护电压: Holdover Voltage:	RC//:150Ω- 100nF;RS=330Ω	≥80V	≥80V	≥80V	≥80V
辉光降压: Glow Voltage:		≤120V	≤120V	≤120V	≤120V
弧光降压: Arc Voltage:		≤25V	≤25V	≤25V	≤25V

3°耐流特性:(试验后满足)

Power-flow Properties:(after life test)

直流导通电压: DC Spark-over Voltage:		376V-564V	425V-575V	400V-600V	595V-805V
冲击导通电压: Impulse Spark-over Voltage:		≤1100V	≤1200V	≤1200V	≤1300V
绝缘电阻: Insulation Resistance:		≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ
交流耐流: AC discharge current:	50/60Hz,600V 5times,1s interval 3min	10A	10A	10A	10A
冲击耐流波形: Impulse discharge current:	8/20μs +5/-5,interval 3min	10kA	10kA	10kA	10kA
冲击耐流波形: Impulse discharge current:	8/20μs 1time	25kA	25kA	25kA	25kA
冲击耐流波形: Impulse discharge current:	10/350μs 1time	2KA	2KA	2KA	2KA
冲击耐流寿命: Impulse life:	10/1000μs 300times,interval 2min	100A	100A	100A	100A

4°产品编码:

Code:

9284021 9284072 9284022 9284079



QVGQ2.E184939

YES



REG.-Nr.40008209

注:1. 可焊接性根据CEI 68-2-20 ; Solderability see CEI 68-2-20

2. 本产品符合2002/95/EC directive(ROHS);所有试验条件均满足ITU-T K.12要求。

This product is 2002/95/EC directive(ROHS);all test are ITU-T K.12 compliant.

总经理 GM	总经理助理 GDTM	销售部 SD	质量部 QD	技术工程部 TD	生产部 PD	日期 Date	编码 N° Code N°
						2009-5-7	92 840 XX XX